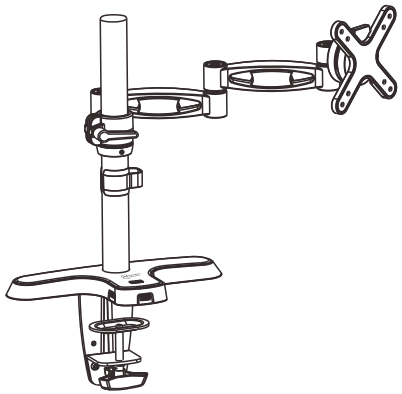

Z1 Pro

Installation Manual



support.arctic.ac/z1pro

Dear Customer,

Thank you for choosing the ARCTIC Z1 Pro.

Ever wanted to show something to your colleague but your monitor was hard to turn? This sturdy holder keeps your monitors save and the desk clean, frees space for you and allows you to use USB 3.0 devices easier than ever.

I hope you enjoy our Z1 Pro and we at ARCTIC look forward to further enriching your life with our products. If you would like to share how you use ARCTIC's products please do so at https://www.facebook.com/ARCTIC.en

ARCTIC is a fully carbon neutral company and your support helps us to compensate every kilogram of CO2 we produce. Thank You.

Sincerely,

Magnus Huber
ARCTIC CEO

Accessories

Ⓐ Adapter Bracket Assembly x1



Ⓑ VESA Plate x1

Ⓒ Pole x1



Ⓓ Desk Clamp x1

Ⓔ Base with USB Interface x1

Ⓕ Power Adapter x1



Ⓖ Hex Key (3 mm) x1

Ⓗ Hex Key (4 mm) x1

Ⓘ Metal Base Plate x1

Ⓙ M4 Screw (12 mm) x4

Ⓚ M5 Screw (12 mm) x4

Ⓛ M4 Screw (14 mm) x4

Ⓜ M5 Screw (14 mm) x4

Ⓝ M4 Screw (30 mm) x4

Ⓞ M5 Screw (30 mm) x4

Ⓟ Socket Head M4 Screw (8 mm) x2

Ⓠ Flat Head M6 Screw (10 mm) x3

Ⓡ Small Spacer x4

Ⓢ Big Spacer x4

Ⓣ D5 Washer x4

Ⓤ Metal Pad x1

Specifications

Arm	
Material	Aluminum Alloy ADC12
Dimensions	55 (L) x 14 (W) x 51 (H) cm
Weight	3.45 kg
Screen Size	13”-27”
Maximum Monitor Weight	10 kg / 22 lbs per mount
VESA Standard	75 / 100
Rotation	360°
Swivel	180°
Tilt	+/-15°
Distance to the Pole	11 - 41 cm
Max Table Thickness	90 mm
Number of Mountable Monitor	1
USB Hub	
Type	4 ports USB 3.0, Powered
Transfer Rate	With USB 3.0 : up to 5 Gbps With USB 2.0 : up to 480 Mbps
Compatibility	Windows 8.1, 8, 7, Vista, XP Mac OS X Linux
Cable Length	2 m
Power Adaptor	
Input	100-240V AC , 50/60Hz, 0.55A
Output	5V DC, 2A
Cable Length	2 m

Preparation

A. Desk Clamp Installation

1A Attach the desk clamp to the base with 4 mm hex key

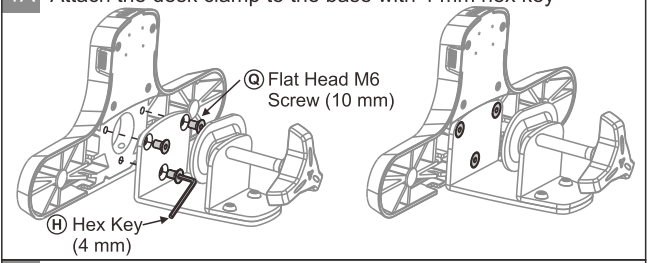

2A Tighten it on table. For table less than 60 mm thickness, use the upper hole

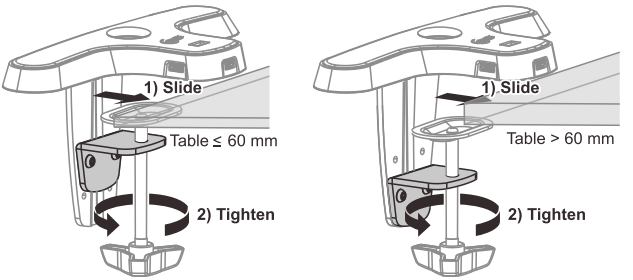

B. Hole Installation

1B Attach the base plate to the base with 4 mm hex key

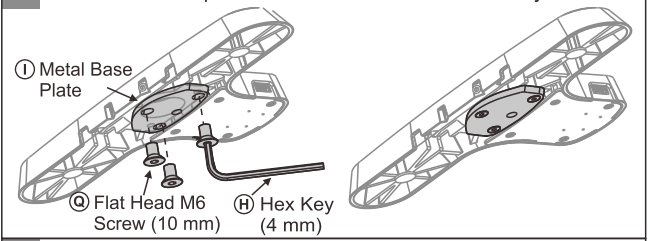

2B Remove the long screw from the desk clamp and tighten it on table.
Hole diameter range: 10-70 mm

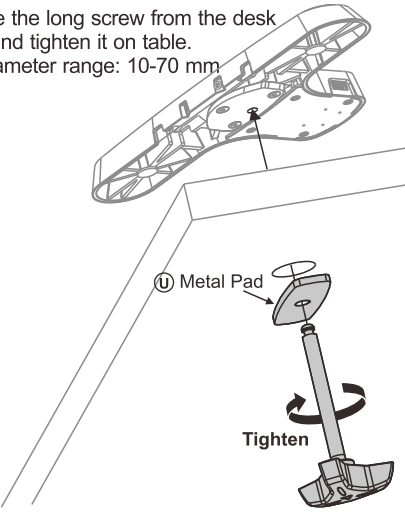

3 Install the pole and adjust the collar to the desire height.
The center of the monitor will be around 12 cm above the collar

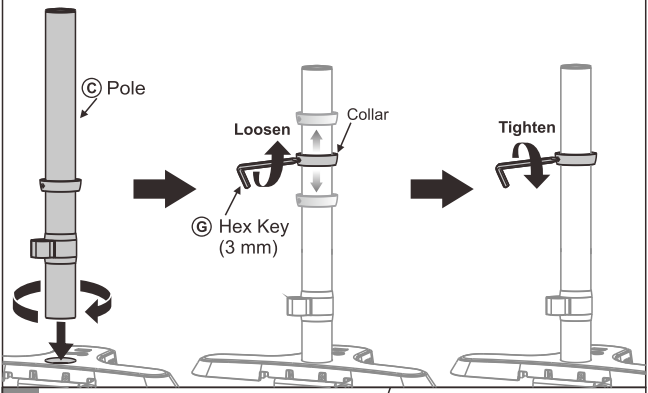

4 Put the arm into the pole

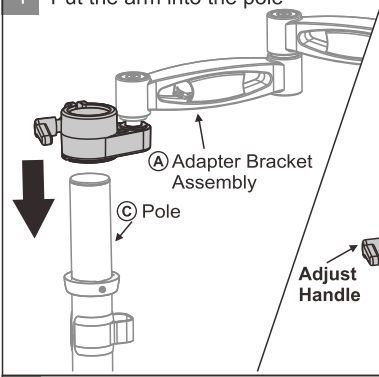

Tighten the adjust handle to fix the arm's position

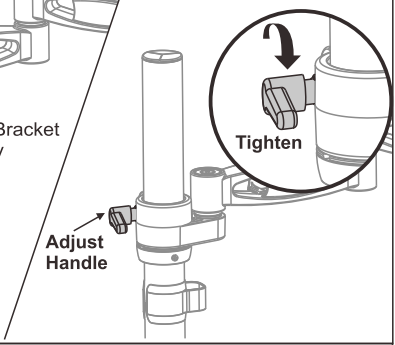

5 Choose the right screws according to the size and depth of the holes at the back of the monitors. Spacers are used to fill the gap between the VESA plate and the monitor if any.

Ⓐ VESA 100 (Distance between each hole = 100 mm)



Ⓑ VESA 75 (Distance between each hole = 75 mm)



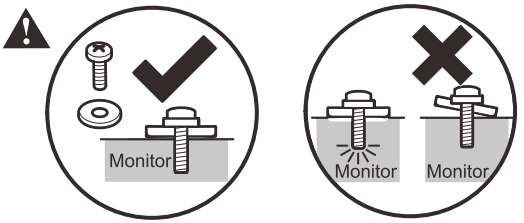

Ⓐ VESA 100







Ⓑ VESA 75







6 Hang the monitor on the arm and fasten the screws with a 3 mm hex key

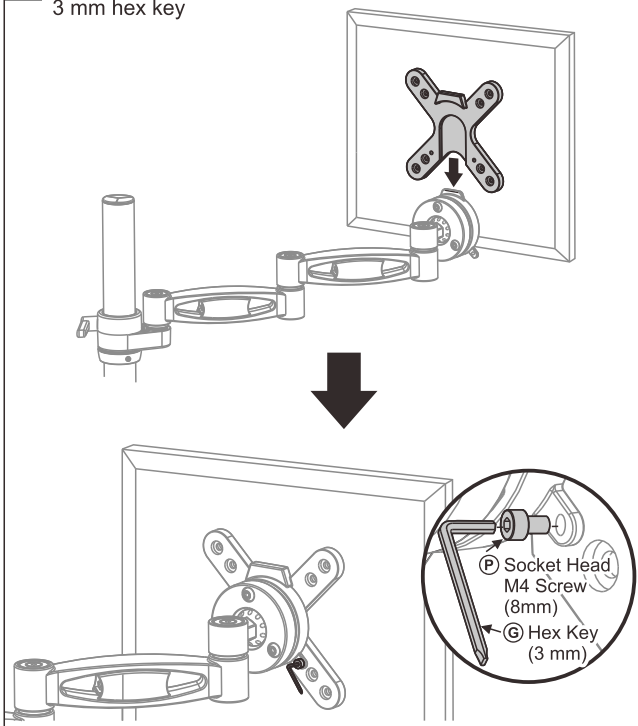

Adjust the Tightness of the Monitors

Slightly loosen or tighten the screw by a 4 mm hex key when the monitor is too tight or loose

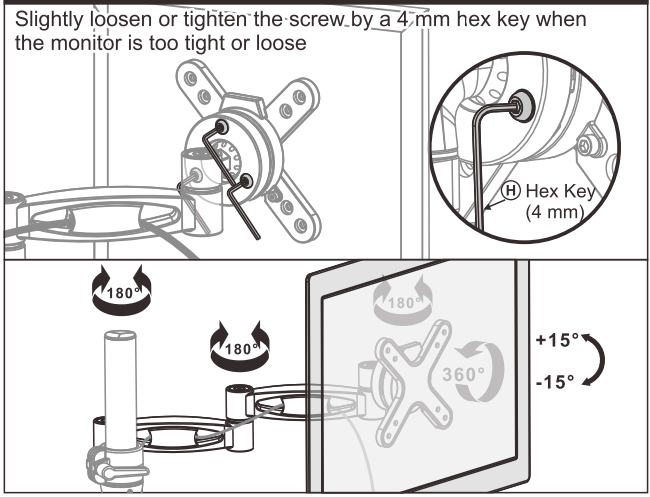

How to Plug USB Hub

Connect the USB cable to PC; connect the DC jack with adapter and to the wall socket

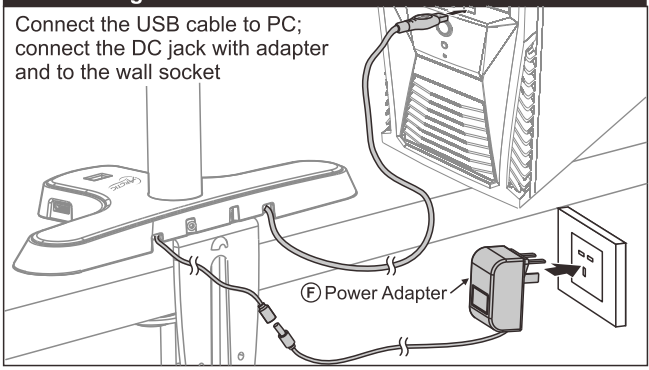

Cable Management

Pass the cable through to the cable clip

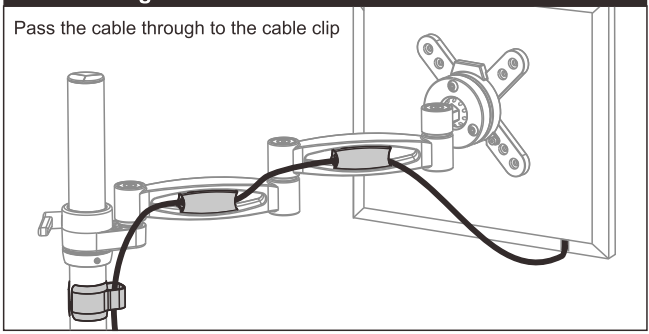

Warranty

This ARCTIC Product includes a two-year limited warranty.
Please visit warranty.arctic.ac for further details.

Like us on facebook
www.facebook.com/ARCTIC.en

© 2014 ARCTIC Switzerland AG. All Rights Reserved.

No part of this manual including the products described in it, may be reproduced, transmitted, stored in a retrieval system, or translated into any language in any form or by any means, except documentation kept by the purchaser for backup purpose, without the express written permission of ARCTIC Switzerland AG. In no event shall ARCTIC its directors or employees be liable for any indirect damages, incidental or consequential damages arising from any defect or error in this manual or product.